



CLAY PAVING BRICKS



De Hoop Red Paver



Champagne Paver

CLAY BRICK PAVERS

For both beauty and durability underfoot, Corobrik hard burnt clay brick pavers offer aesthetic appeal as well as great practicality. Every paver is originated with clay drawn from age old deposits, exuding its own earthy personality. Corobrik's distinctive range spans an extensive palette of colours and textures, offering an excellent spectrum for all tastes and lifestyles.

The Corobrik paving range is designed to complement corresponding face brick ranges and may be laid in many attractive angular and radial patterns.



CHAMPAGNE PAVER PA (SABS 1575:2007)
(ISO 9001:2008)
220 x 108.5 x 50mm/200 x 98.5 x 65mm
(Chamfered and Nibbed). Available in special shapes and bullnose. Springs Factory – Gauteng



DUNE PAVER PB
200 x 98.5 x 50mm / 200 x 98.5 x 65mm
Available in special shapes
Phesantekraal Factory – Western Cape



CEDERBERG PAVER PA (SABS 1575:2007)
(ISO 9001:2008)
220 x 108.5 x 50mm/200 x 98.5 x 65mm
(Chamfered and Nibbed). Available in special shapes and bullnose. Springs Factory – Gauteng



MEADOW PAVER PB
200 x 98.5 x 50mm / 200 x 98.5 x 65mm
Available in special shapes
Phesantekraal Factory – Western Cape



CONSTANTIA PAVER PB
200 x 98.5 x 50mm / 200 x 98.5 x 65mm
Available in special shapes
Phesantekraal Factory – Western Cape



DE HOOP RED PAVER PB
200 x 98.5 x 50mm / 200 x 98.5 x 73mm
Available in special shapes
De Hoop Factory – Western Cape



TUSCAN BLEND PAVER PA (SABS 1575:2007)
(ISO 9001:2008)
220 x 108.5 x 50mm/200 x 98.5 x 65mm
(Chamfered and Nibbed). Available in special shapes and bullnose. Springs Factory – Gauteng



NUTMEG PAVER PA (SABS 1575:2007)
(ISO 9001:2008)
220 x 108.5 x 50mm / 200 x 98.5 x 65mm
(Chamfered and Nibbed). Available in special shapes and bullnose. Springs Factory – Gauteng



DE HOOP MATT BROWN PAVER PB
200 x 98.5 x 50mm/200 x 98.5 x 73mm
Available in special shapes
De Hoop Factory – Western Cape



CAPE STORMBERG PAVER PB
200 x 98.5 x 50mm/200 x 98.5 x 65mm
Available in special shapes
Phesantekraal Factory – Western Cape

CLAY PAVING

SABS BRICK CLASSIFICATION

- **PA – CLAY PAVERS (1:1, 2:1 or 3:1)**


Clay pavers that are selected or produced for their durability and for a high degree of uniformity in size and shape, and that have dimensions such that the ratio of work size length to work size is approximately 1:1, 2:1 or 3:1.

- **PB – CLAY PAVERS**

Clay pavers that are selected or produced for their durability and for their uniformity in size and shape.

BOND PATTERNS

- Herringbone bond is recommended for areas with vehicular traffic.
- Other bonds may be used for pedestrian traffic.

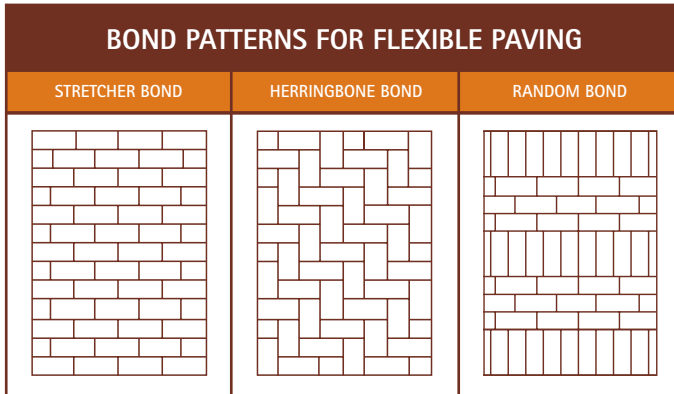

CLAY PAVING QUANTITIES				
VARIOUS PAVER SIZES (mm) LENGTH x WIDTH x DEPTH	APPROXIMATE USAGE (Qty/m ²)		AREA PER 1000 PAVERS	
	Flexible <small>(assumes 3mm joint)</small>	Rigid <small>(assumes 10mm joint)</small>	Flexible <small>(assumes 3mm joint)</small>	Rigid <small>(assumes 10mm joint)</small>
220 x 108.5 x 50	41	36	25m ²	27m ²
220 x 98.5 x 65	48	43	21m ²	23m ²
200 x 98.5 x 50	48	43	21m ²	23m ²
200 x 98.5 x 65	49	44	21m ²	23m ²
200 x 98.5 x 73	48	43	21m ²	23m ²
222 x 73 x 106 (brick on edge)	61	52	16m ²	19m ²

Every effort has been made in the photographic, reproduction and printing process to feature a portrayal of each panel as it would appear in real life. However, the only accurate way to assess the true aesthetic appeal of face brick is to view the product.

www.corobrik.co.za | info@corobrik.co.za

Gauteng: (011) 871 8600 | Durban: (031) 560 3111 | Stellenbosch: (021) 888 2300

